


Side View

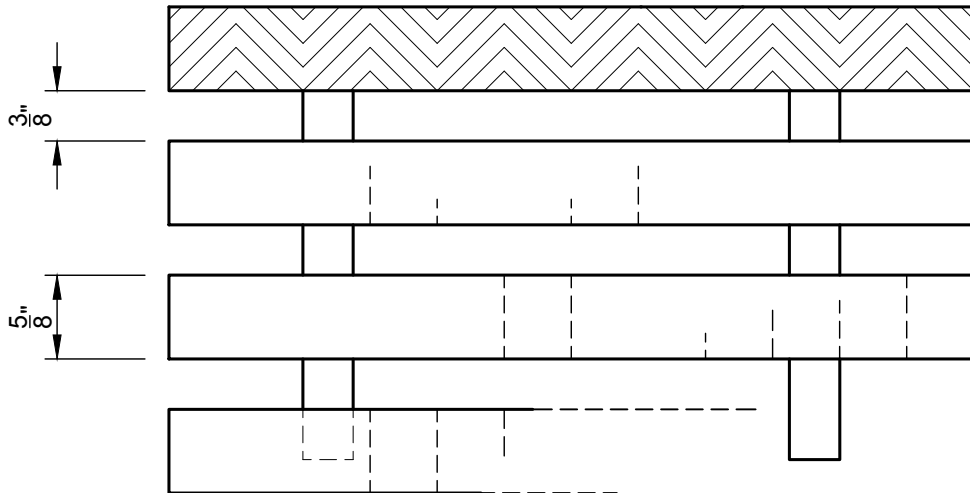

Top View

Technical Data:

- Width of Bar top 5/8" wide
- Gap between bars 3/8" wide (Max)
- Open area/sq. ft. 37.5%
- Grating Height 1"
- Deflection at 300 lbs per ASTM D790-10 3/16"
- Surface Texture Slip-resistant
- Warranty 10 Years

Design & Product Information:

DuraTech Inter-Locking PVC grating is formulated with maximum U.V. inhibitors added to 100% virgin exterior grade impact resistant PVC resin. Integral slip-resistance is embossed into the grating top surface as a standard safety feature. Custom configurations, radius, bends and various designs are available. Standard white color, custom colors available upon request.

Note:

Purchaser / Owner is to verify the grating is compatible for their application. PoolEquip will have no responsibility for the swimming pool flow requirements

Installation:

To be supported at all grating ends and corners. Anchor assemblies should be installed every 15" on center, staggering from one side of grating to the other. It is necessary to support all grating ends for proper safety requirements.

X _____
 Authorization to Fabricate: _____ Date: _____

DuraTech™ Inter-Lock

PVC Grating U.V.

poolequip.com

Project: For Sales Purposes Only
 Part# GRT 6-WH
 6" DuraTech PVC Interlock, White

Date:
 Drawn by: EFB
 Appr'd by:


DWG #: _____ Scale: N/A
 Issue Date: _____ Item #: _____

1 of 2

Phone: 800-287-1588
 www.poolequip.com


All designs and data included and implied, within the contents of the submitted designs are proprietary. All submitted designs and data are subject to verification from the purchaser/owner. PoolEquip will not be held liable based upon inaccurate information and unknown conditions. We reserve the right to modify details without notice where conditions require. No documents shall be modified, copied or reproduced without express written consent of PoolEquip. 2008-2017 PoolEquip LLC, All Rights Reserved

Installation Instructions

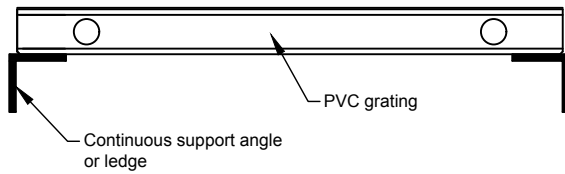

(Diagram A)

Note:
Support grating continuously on all grating ends.

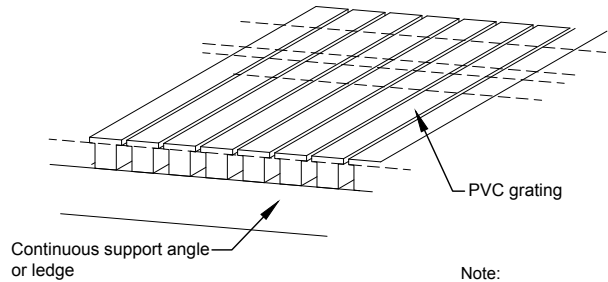


(Diagram B)

Note:
Support grating continuously on all grating ends.

Installation
Locate grating on support ledge, slide the stainless steel anchor clip into place as shown. Anchor assemblies should be installed max 15" on center, staggering from one side of grating to the other. It is necessary to support all grating ends for proper safety requirements.

Concrete Gutter - Mark hole location and drill a 1/4" Dia. hole. Insert bantam sleeve into hole, replace anchor clip and fasten through the anchor clip and secure into the bantam anchor.


S/S Gutter - Mark hole location and drill a 9/64" Dia. hole into support angle and tap using #8/32. Replace anchor clip and fasten through the anchor clip and secure into the support angle. Do not over tighten.

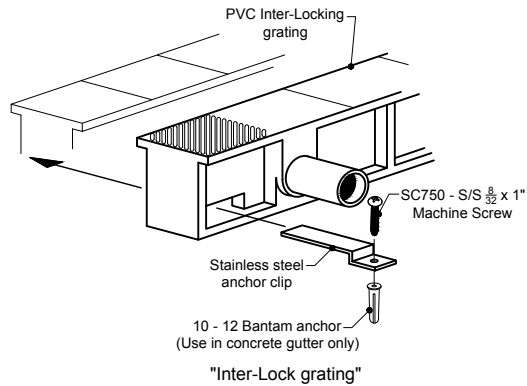


(Diagram E)

Note:
Make certain that corner grates are fully supported on all sides.

Note:
Make certain that corner grates are fully supported on all sides.

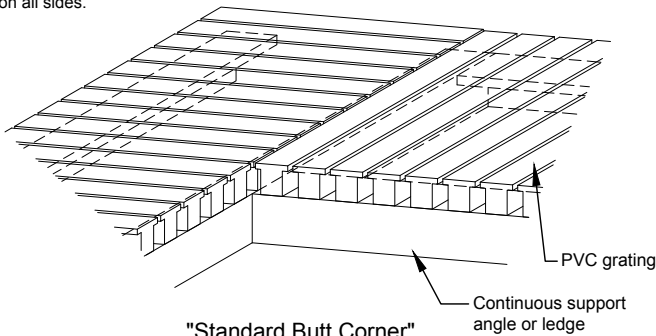

(Diagram C)

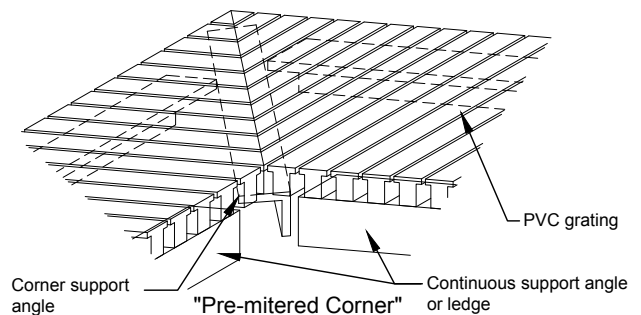

(Diagram D)

poolequip.com
poolequip™

Project: For Sales Purposes Only
Part# GRT 6-WH
6" DuraTech PVC Interlock, White

Date:

Drawn by: EFB

Appr'd by:

DWG #:

Scale: N/A

Issue Date:

Item #:

2 of 2

Phone: 800-287-1588
www.poolequip.com

All designs and data included and implied, within the contents of the submitted designs are proprietary. All submitted designs and data are subject to verification from the purchaser/owner. Poolequip will not be held liable based upon inaccurate information and unknown conditions. We reserve the right to modify details without notice where conditions require. No documents shall be modified, copied or reproduced without express written consent of Poolequip. 2008-2017 Poolequip LLC, All Rights Reserved